




98717733 JPC 3-42 A-C-BBVP 50 Hz

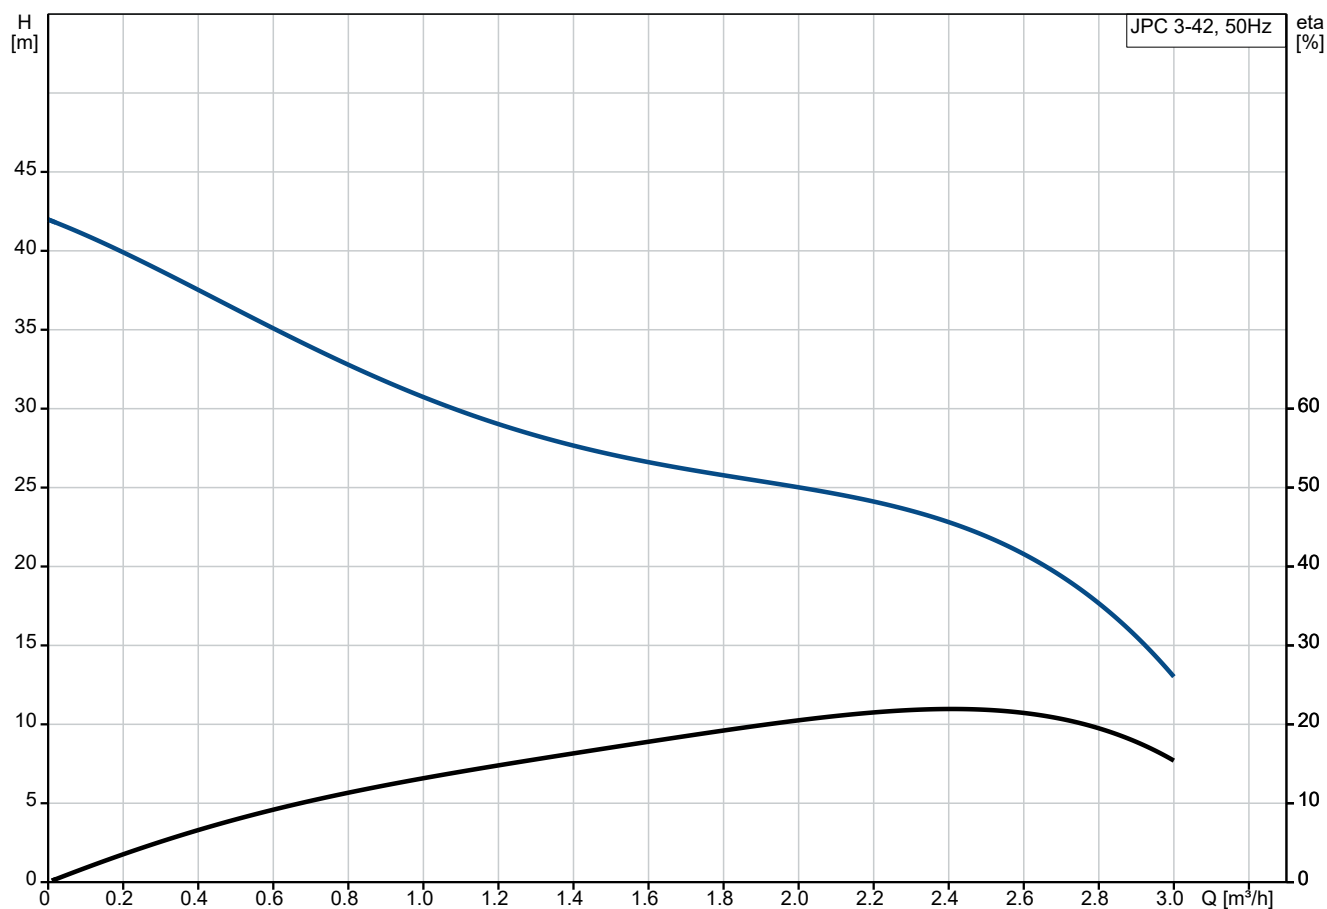

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

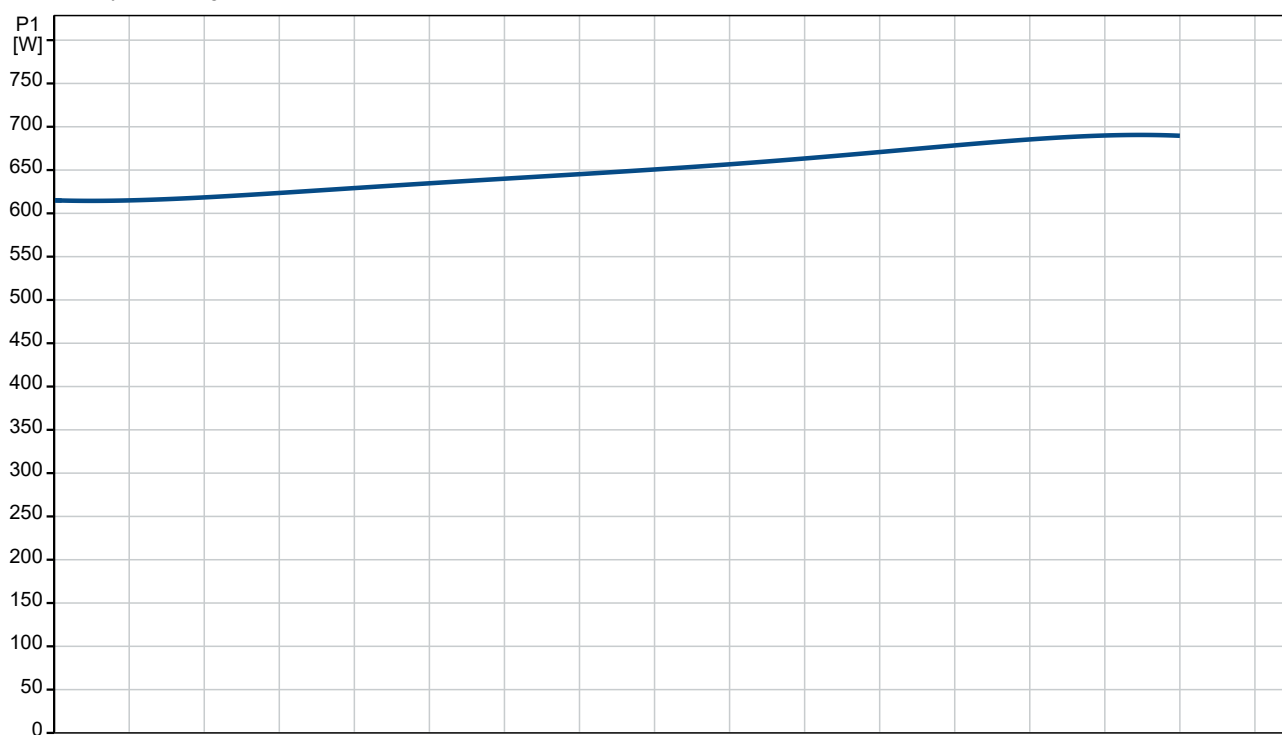

Description	Value
General information:	
Product name:	JPC 3-42 A-C-BBVP
Product No:	98717733
EAN number:	5712600400566
Technical:	
Head max:	42 m
Primary shaft seal:	BBVP
Approvals:	CE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Ejector valve:	N
Materials:	
Pump housing:	COMPOSITE
Impeller:	Composite
Material code:	C
Installation:	
Range of ambient temperature:	-10 .. 40 °C
Maximum operating pressure:	6 bar
Maximum permissible inlet pressure:	2 bar
Pump inlet:	G1
Pump outlet:	G1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input - P1:	720 W
Rated power - P2:	0.441 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.12 A
Capacitor size - run:	12 µF/450 V
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Type of cable plug:	NONE
Cable:	Y
Controls:	
Presscontrol:	N
Switch:	N
Others:	
Net weight:	8 kg
Gross weight:	9 kg
Shipping volume:	0.026 m³

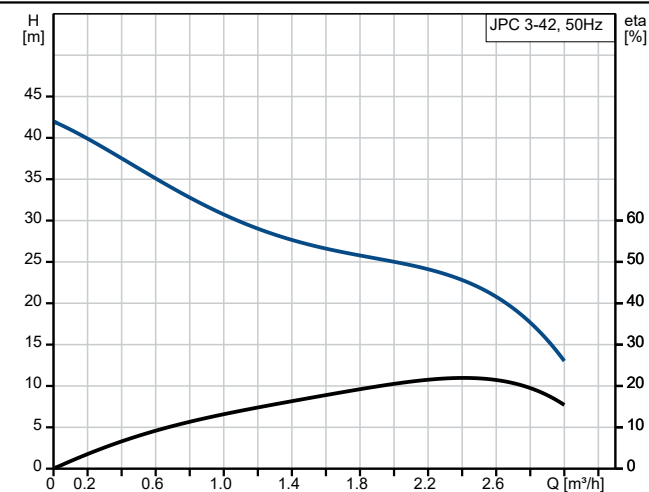

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

