




## 99133068 HYDRO MULTI-E 2 CRE 15-3

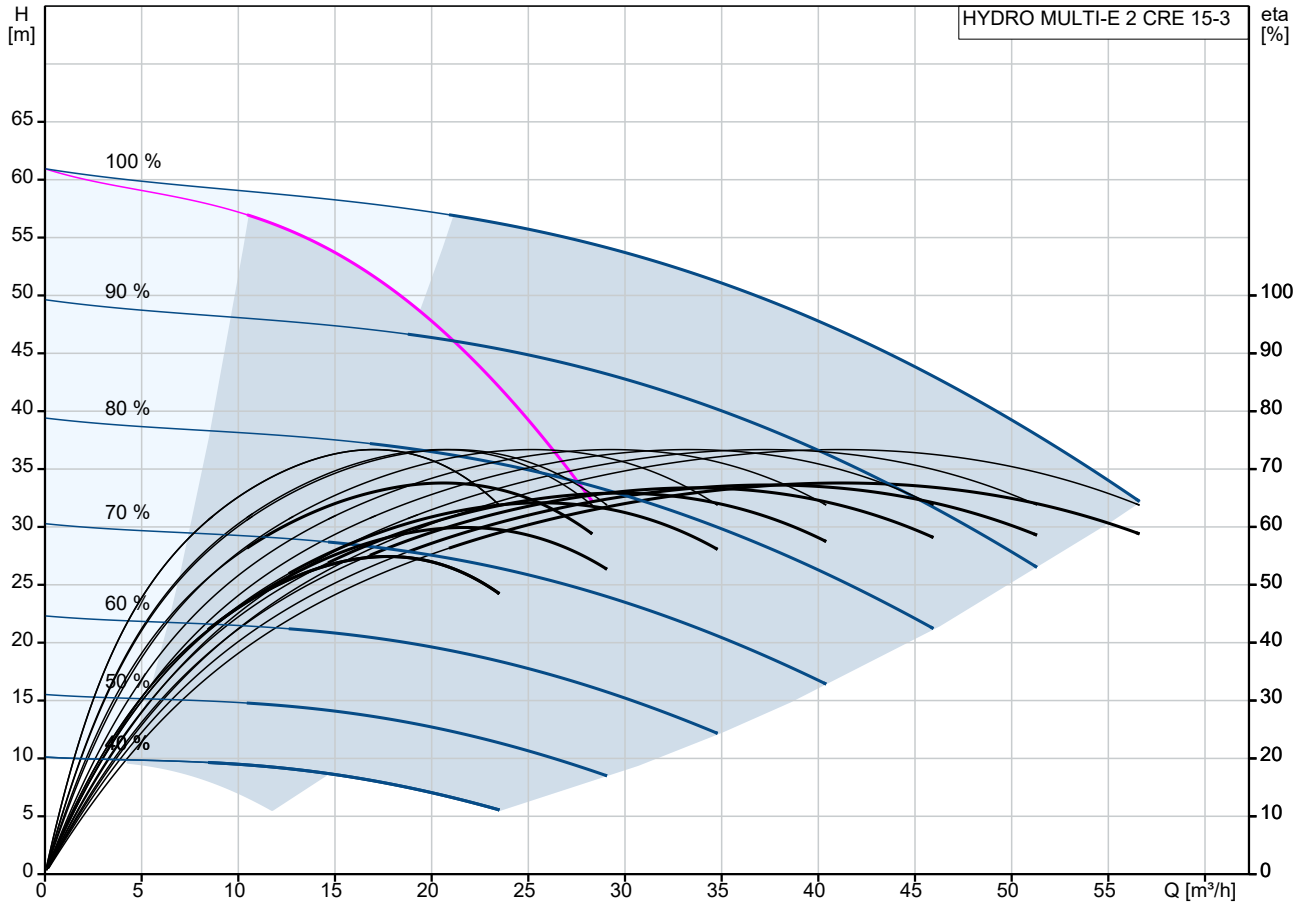

Losses in fittings and valves not included  
 Pumped liquid = Water  
 Liquid temperature during operation = 20 °C  
 Density = 998.2 kg/m³

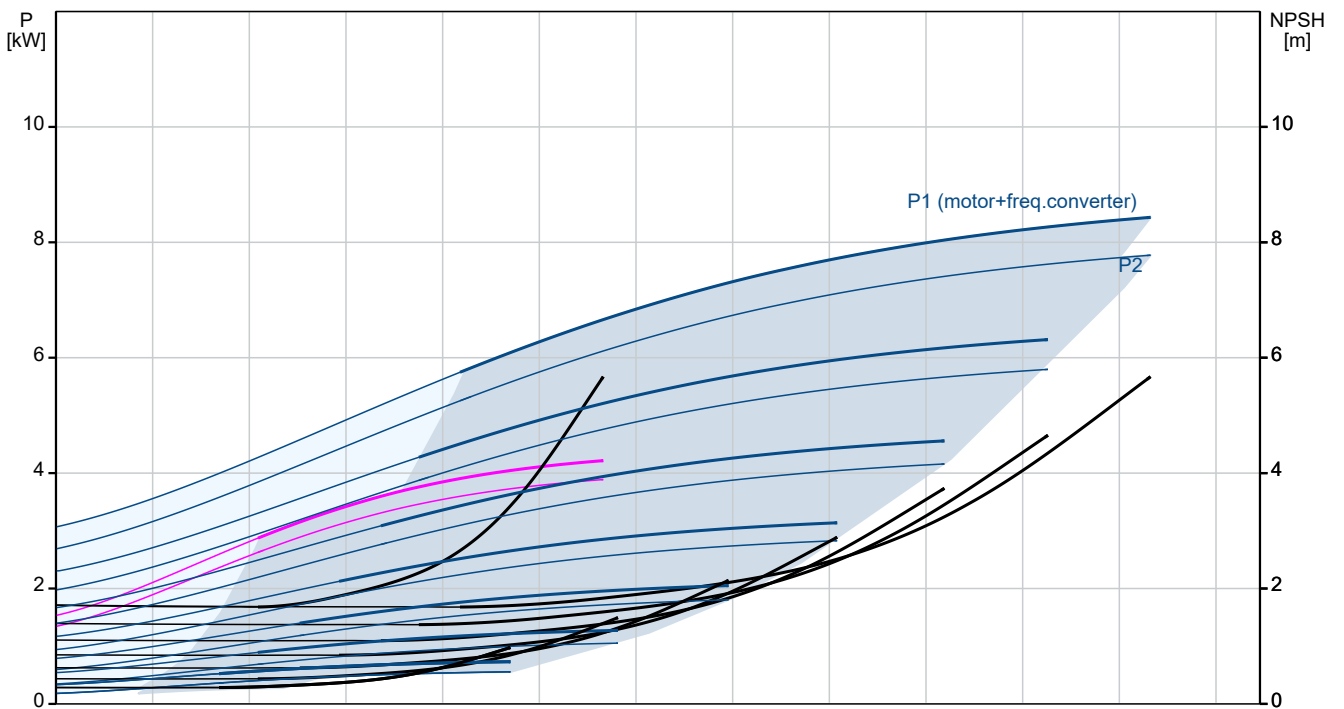

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-E 2 CRE 15-3
Product No:	99133068
EAN number:	5712607359201
<b>Technical:</b>	
Max flow:	60.4 m <sup>3</sup> /h
Min flow system:	6 m <sup>3</sup> /h
Head max:	62 m
Pump name:	CRE 15-3
Number of pumps:	2
<b>Materials:</b>	
Pump housing:	Cast iron
Manifolds:	Stainless steel
<b>Installation:</b>	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Maximum permissible inlet pressure:	PN 10 bar
<b>Flange standard:</b>	
Flange standard:	DIN2642
Manifold inlet:	DN 80
Manifold outlet:	DN 80
Earth connection:	PE
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	5 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power (P2) main pump:	4 kW
Mains frequency:	50 / 60 Hz
Rated voltage:	3 x 380-415 V
Rated current:	15.2 A
IE Efficiency class:	IE5
Start. method:	E
Enclosure class (IEC 34-5):	IP54
<b>Tank:</b>	
Volume of pressure tank:	18 l
Diaphragm tank:	Y
<b>Others:</b>	
Net weight:	210 kg
Gross weight:	267 kg
Shipping volume:	0.955 m <sup>3</sup>
Language:	MULTI

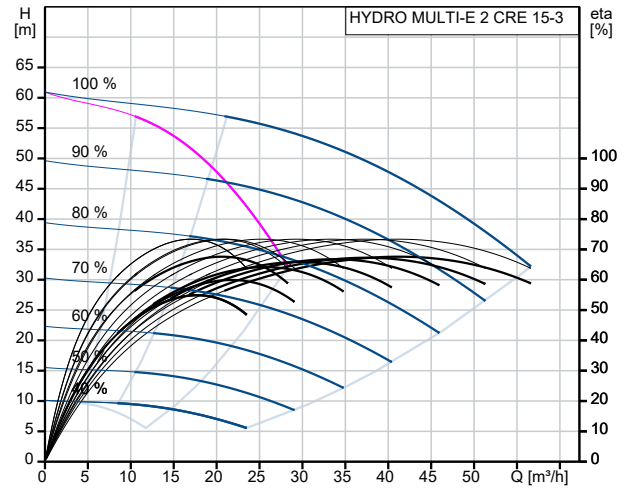

Losses in fittings and valves not included  
 Pumped liquid = Water  
 Liquid temperature during operation = 20 °C  
 Density = 998.2 kg/m<sup>3</sup>

