



012H1600 UNILIFT KP.250.A.1 50 Hz

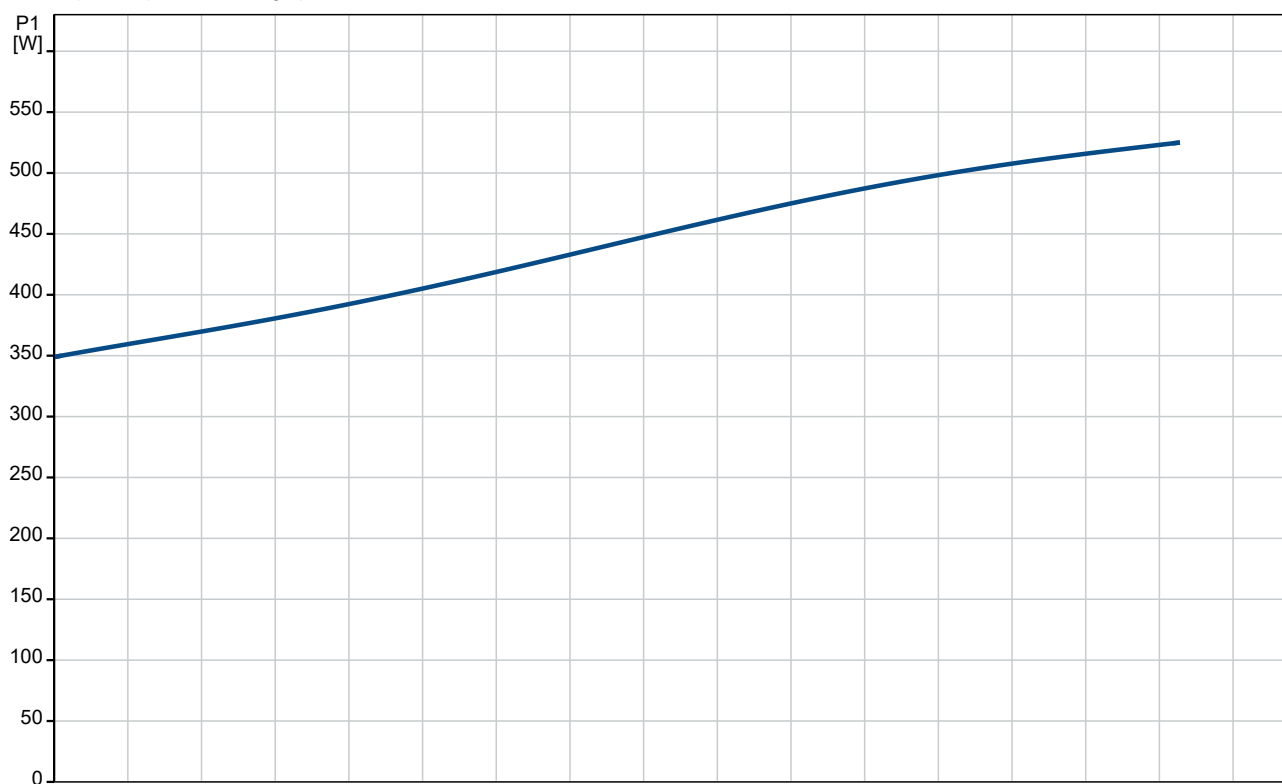

Description	Value
General information:	
Product name:	UNILIFT KP.250.A.1
Product No:	012H1600
EAN number:	5700391116575
Technical:	
Maximum flow:	3.11 l/s
Rated head:	5.12 m
Maximum head:	7.5 m
Max. Particle:	10 mm
Approvals:	CE,RCM,VDE,LGABG,EAC,TUV RHWID,MORO,UKCA,SEPRO
Model:	A
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 50 °C
Type of connection:	Rp
Size of connection:	1 1/4 inch
Maximum installation depth:	2 m
Place of installation:	Indoor
Liquid:	
Liquid temperature range:	0 .. 50 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	480 W
Rated power - P2:	0.25 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-230 V
Rated current:	2.3 A
Capacitor size - run:	8 µF/400 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	INT.
Length of power cable:	5 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	A
Others:	
Net weight:	6.42 kg
Gross weight:	7.11 kg
Shipping volume:	0.013 m ³
Danish VVS No.:	391215025
Environmental approvals:	WEEE

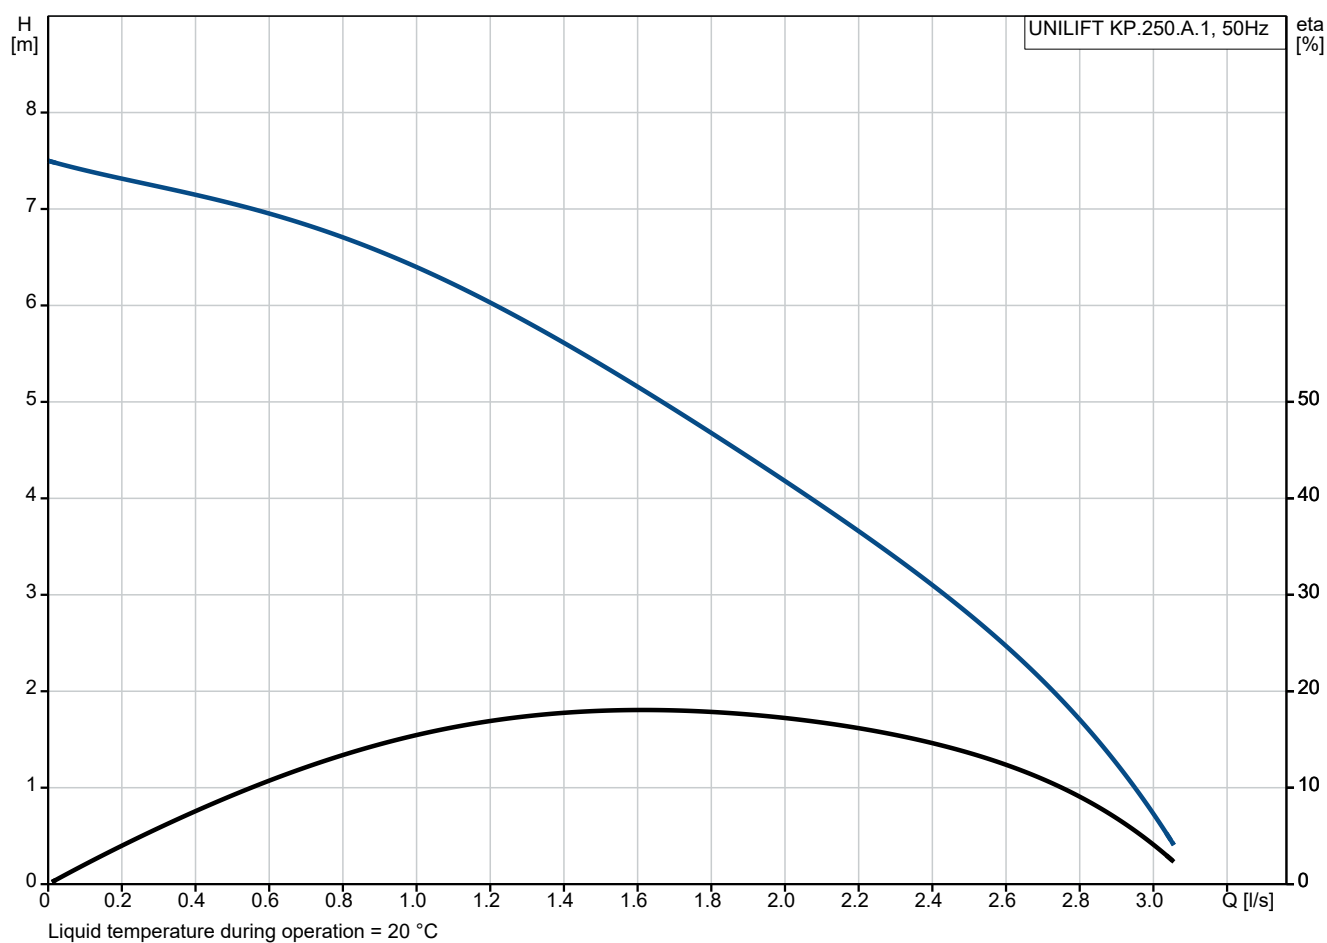