


Description	Value
General information:	
Product name:	UNILIFT AP35B.50.08.A1V
Product No:	96004574
EAN number:	5700391489013
Technical:	
Maximum flow:	5.83 l/s
Maximum head:	13 m
Type of impeller:	VORTEX
Max. Particle:	35 mm
Approvals:	CE,RCM,VDE,LGABG,EAC,TUV RHWID,MORÖ,UKCA,SEPRO
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	Rp
Size of connection:	2 inch
Maximum installation depth:	2 m
Inst dry/wet:	S
Installation:	H/V
Auto-coupling:	Y
Place of installation:	Indoor
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	1.25 kW
Motor type 1-phase:	PSC
Rated power - P2:	0.71 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	5.44 A
Cos phi - power factor:	0.98
Rated speed:	2795 rpm
Capacitor size - run:	16 µF/400 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	INT.
Length of power cable:	5 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	A
Others:	
Net weight:	11 kg
Gross weight:	12 kg
Danish VVS No.:	391270332
Swedish RSK No.:	5885934
Finnish LVI No.:	4822555
Norwegian NRF no.:	9045691
Environmental approvals:	WEEE



Liquid temperature during operation = 20 °C

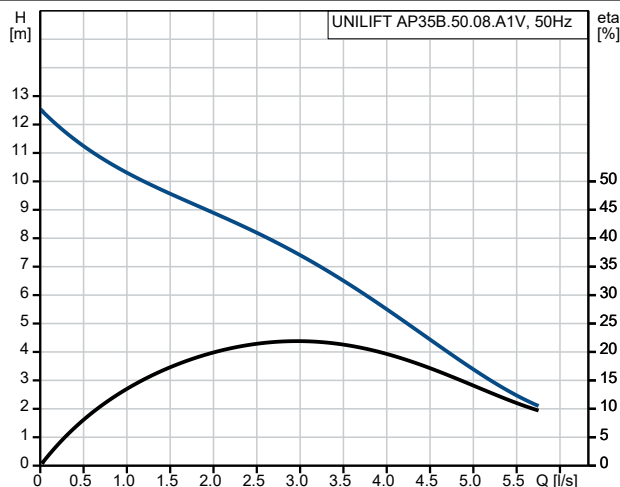