



Company name: Created by: Phone:

Date: 19/07/2024

91048635 HYDRO MULTI-S 2 CM3-7 50 Hz

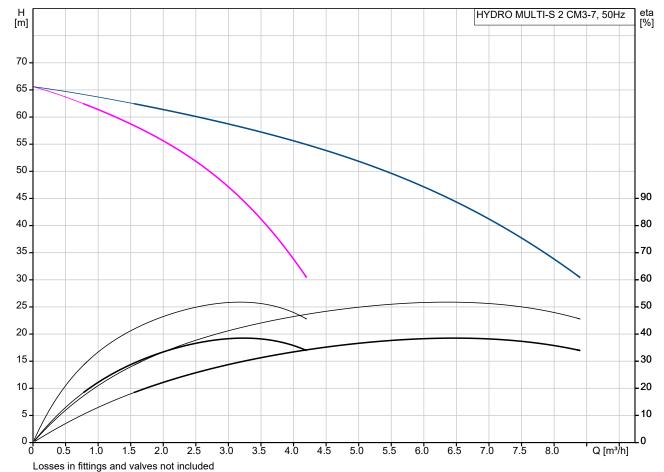

Losses in fittings and valves not included Pumped liquid = Water Liquid temperature during operation = 20 °C

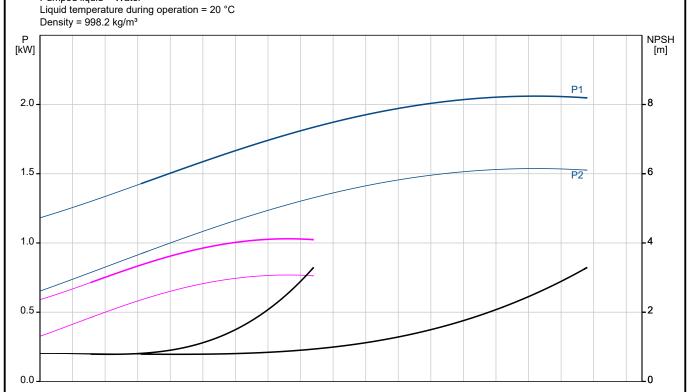




Company name: Created by: Phone:

Date: 19/07/2024

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CM3-7
Product No:	91048635
EAN number:	5712607681401
Technical:	
Min flow system:	0.8 m³/h
Max flow system:	8.6 m³/h
Maximum head:	55.3 m
Approvals:	CE
Pump name:	CM3-7
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Manifold:	Stainless steel
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	1.5
Earth connection:	N, PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	48 kg
Gross weight:	56 kg
Language:	F
Sales region:	France



Losses in fittings and valves not included Pumped liquid = Water Liquid temperature during operation = 20 °C Density = 998.2 kg/m³

