



Company name:


Created by:

Phone:


Date:

19/07/2024


### 97923557 HYDRO MULTI-S 2 CMV3-6 50 Hz

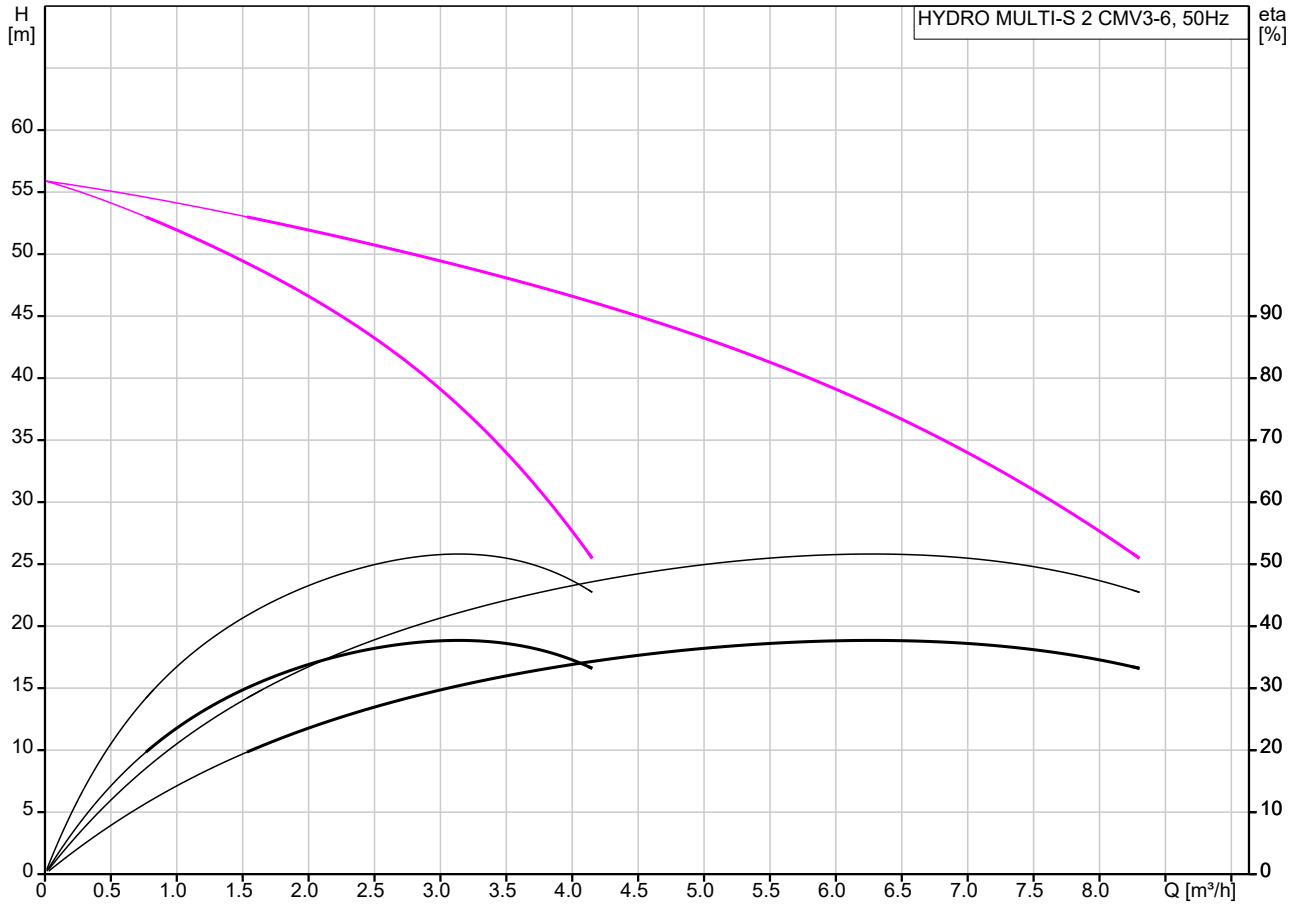

Losses in fittings and valves not included  
Pumped liquid = Water  
Liquid temperature during operation = 20 °C  
Density = 998.2 kg/m³

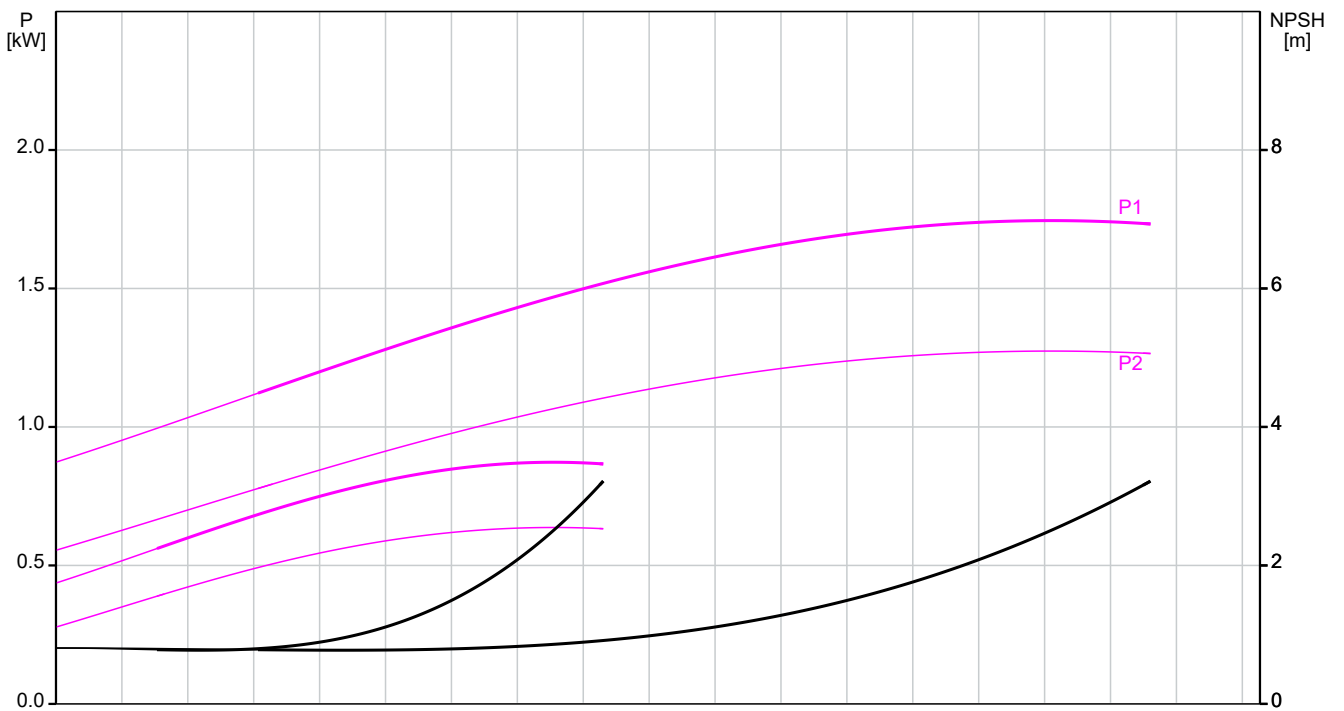

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-S 2 CMV3-6
Product No:	97923557
EAN number:	5710626480760
<b>Technical:</b>	
Min flow system:	0.8 m <sup>3</sup> /h
Max flow system:	8.6 m <sup>3</sup> /h
Maximum head:	46 m
Approvals:	CE
Pump name:	CMV3-6
Non-ret. valve:	YES
Number of pumps:	3
<b>Materials:</b>	
Manifold:	Galvanised steel
<b>Installation:</b>	
Maximum operating pressure:	10 bar
Pipe connection:	2
Earth connection:	PE
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	5 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240/380-415 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
<b>Others:</b>	
Net weight:	51 kg
Gross weight:	55 kg
Language:	GB

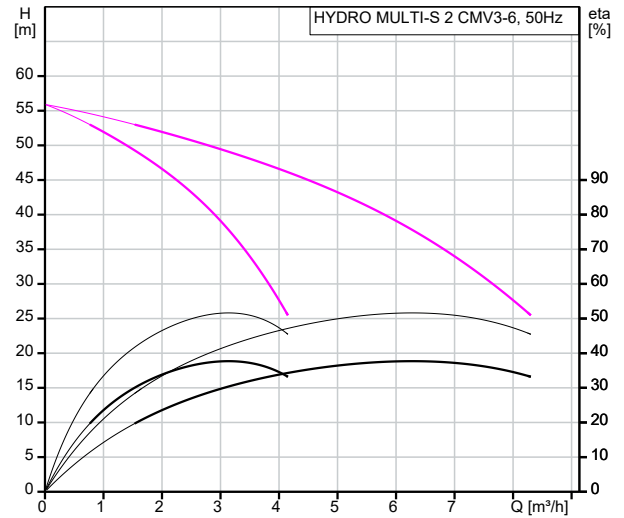

Losses in fittings and valves not included  
 Pumped liquid = Water  
 Liquid temperature during operation = 20 °C  
 Density = 998.2 kg/m<sup>3</sup>

