



96280966 Unilift CC5 - A1 50 Hz

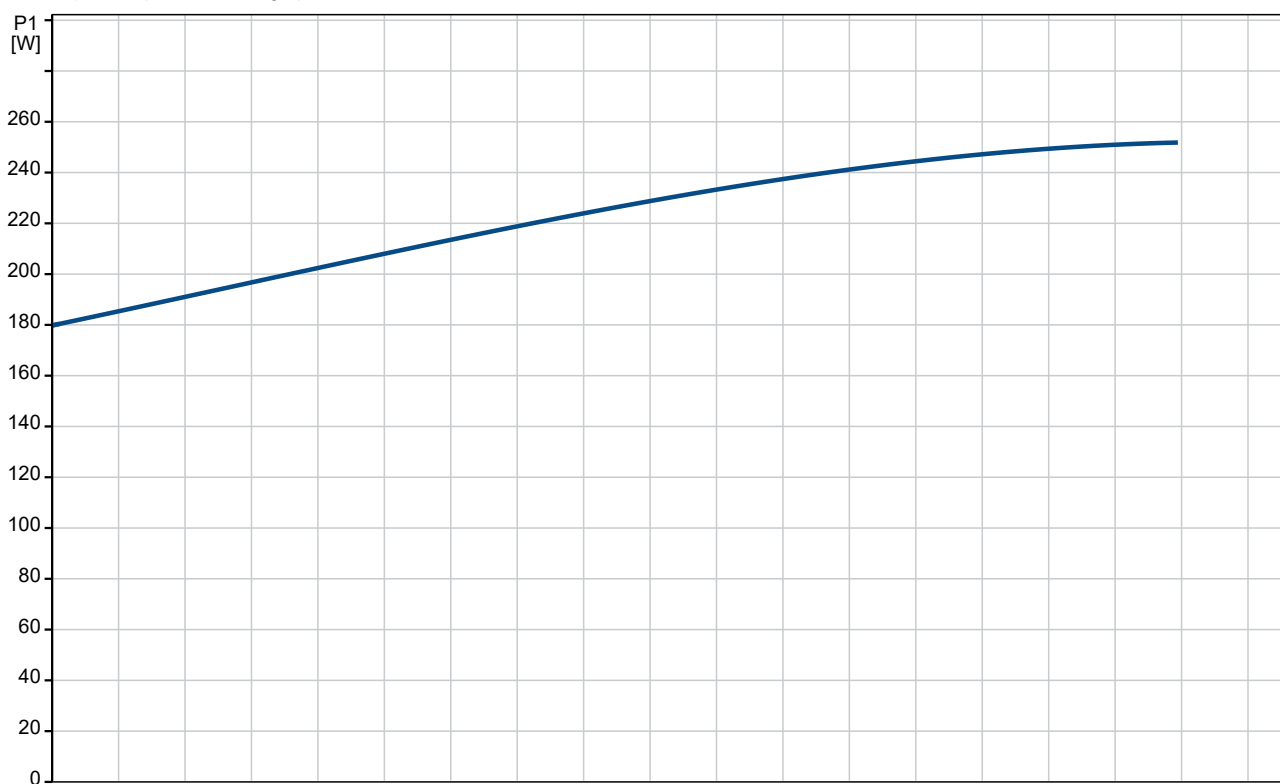

Description	Value
General information:	
Product name:	Unilift CC5 - A1
Product No:	96280966
EAN number:	5700830761366
Technical:	
Rated flow:	0.711 l/s
Maximum flow:	1.67 l/s
Rated head:	2.52 m
Maximum head:	5 m
Max. Particle:	10 mm
Approvals:	CE,LGA,VDE,UKCA,SEPRO
Materials:	
Pump housing:	Polypropylene
Pump housing:	PP - GF15
Impeller:	Composite
Impeller:	PP 20 GF
Motor:	Stainless steel
Motor:	EN 1.4301
Motor:	AISI 304
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	R
Size of connection:	1 1/4 inch
Maximum installation depth:	2 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	250 W
Rated power - P2:	0.108 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	0.98 A
Rated speed:	2850 rpm
Capacitor size - run:	4 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	YES
Length of power cable:	5 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	A
Others:	
Net weight:	4.51 kg
Gross weight:	5.27 kg
Shipping volume:	0.017 m³
Danish VVS No.:	391280351
Swedish RSK No.:	5885924
Norwegian NRF no.:	9045634
Environmental approvals:	WEEE

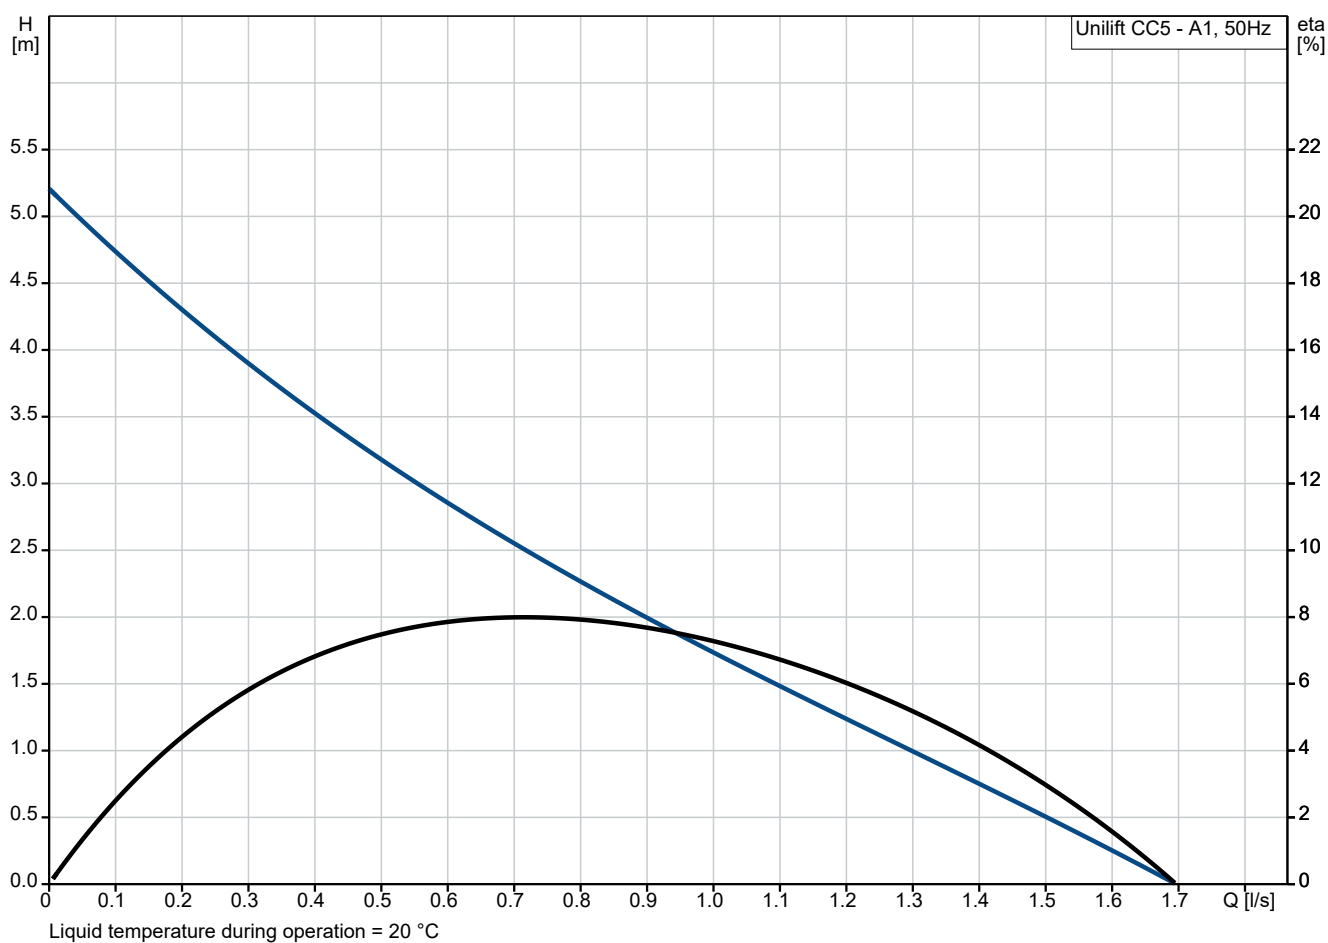