

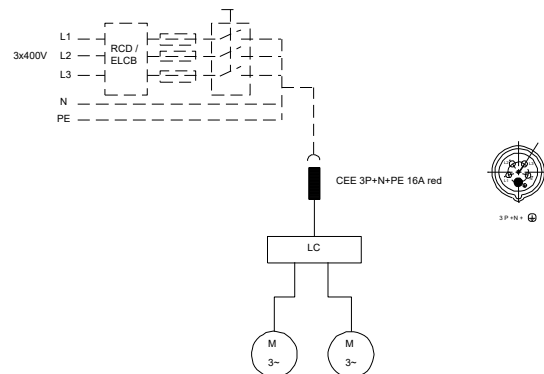
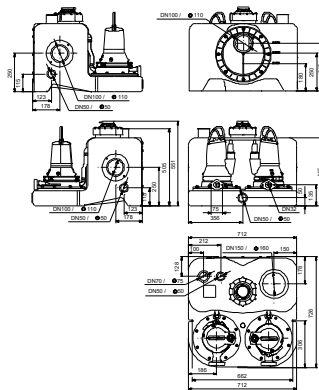


Description	Value
General information:	
Product name:	MDG.15.3.2
Product No:	97901140
EAN number:	5710626081400
Technical:	
Pump speed on which pump data are based:	2700 rpm
Rated flow:	0.889 l/s
Maximum flow:	5.2 l/s
Rated head:	24 m
Maximum head:	25.8 m
Type of impeller:	GRINDER SYSTEM
Max. Particle:	50 mm
Approvals:	CE,EAC,MORO,UKCA,SE PRO
Materials:	
Pump housing:	EN 1561 EN-GJL-200
Pump housing:	ASTM A48-30B
Tank:	PLASTIC
Tank:	LDPE
Gasket:	SIC/SIC
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of outlet connection:	Oval
Size of outlet connection:	DN 32
Pressure rating for connection:	PN 6
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	2.3 kW
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Voltage tolerance:	+10/-10 %
Max starts per hour:	60
Rated current:	2 X 3,8 A
Cos phi - power factor:	0.87
Motor efficiency at full load:	72 %
Number of poles:	2
Start. method:	DOL
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	THERMAL SWITCH
Length of cable:	1.5 m
Motor cable:	10 m
Cable type:	H07RN-F
Power plug:	CEE 3P+N+E
Mains cable:	H05 VV-F
Controls:	
Type of control box:	LC231
Operation mode:	S3-35% 1MIN
Tank:	
Total volume of tank(s):	93 l
Total effective volume of collecting tank at 180 mm inlet:	23 l
Total effective volume of collecting tank at 250 mm inlet:	37 l

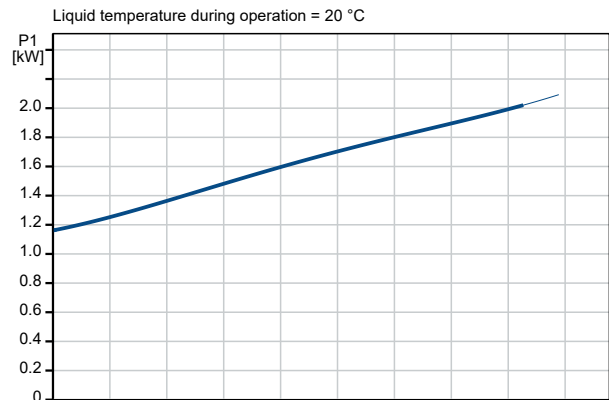

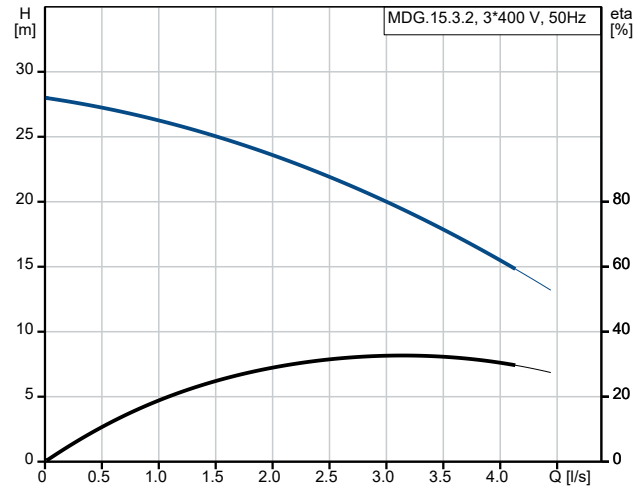

Company name:

Created by:

Phone:

Date:

18/07/2024

Description	Value
Total effective volume of collecting tank at 315 mm inlet:	50 l
Others:	
Net weight:	112 kg
Gross weight:	136 kg
Danish VVS No.:	154035215
Swedish RSK No.:	5886087
Finnish LVI No.:	4965375
Norwegian NRF no.:	9045309
Environmental approvals:	WEEE