



Company name:


Created by:

Phone:



Date:

18/07/2024



97974043 DDE 6-10 WITH ACCESS.

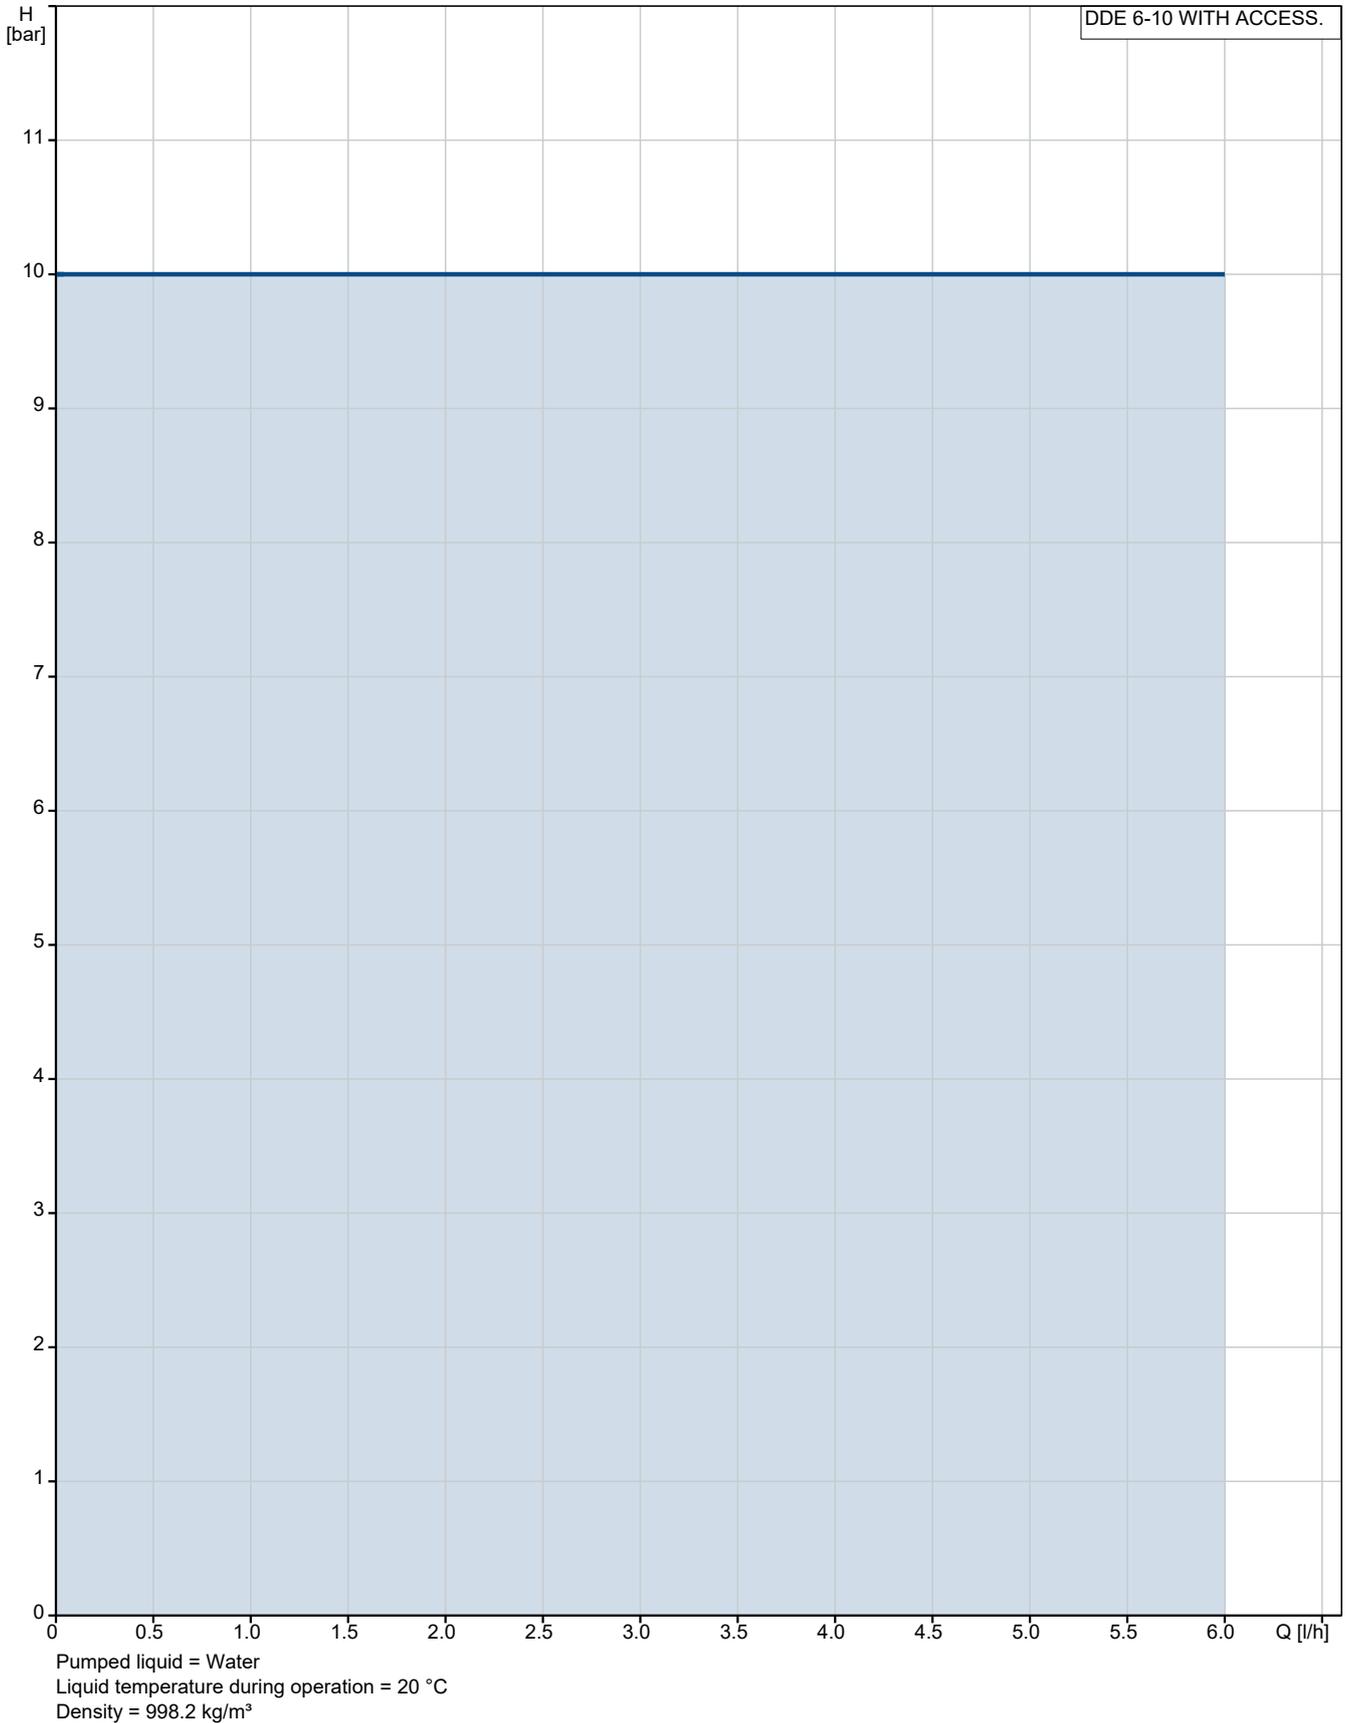

Description	Value
General information:	
Product name:	DDE 6-10 WITH ACCESS.
Product No:	97974043
EAN number:	5710627287696
Technical:	
Type key:	DDE 6-10 P-PVC/V/C WITH ACCESS
Max. Flow:	6 l/h
Min flow:	6.0 ml/h
Turn-down ratio:	1:1000
Approvals:	CE, CSA-US, NSF61, EAC
Valve type:	Standard
Maximum viscosity at 100 %:	50 mPas
Maximum viscosity in slow mode 50 %:	N/A mPas
Maximum viscosity in slow mode 25 %:	N/A mPas
Accuracy of repeatability:	5 %
Materials:	
Dosing head:	PVC (Polyvinyl chloride)
Valve ball:	Ceramic
Gasket:	FKM
Installation:	
Range of ambient temperature:	0 .. 45 °C
Maximum operating pressure:	10 bar
Installation set:	YES
Installation type:	No installation set
Pump inlet:	4/6, 6/9, 6/12, 9/12 mm
Pump outlet:	4/6, 6/9, 6/12, 9/12 mm
Max. Suction lift during operation:	6 m
Max. Suction lift during priming:	2 m
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Maximum power input - P1:	19 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 100-240 V
Enclosure class (IEC 34-5):	IP65 / TYPE 4X
Length of cable:	1.5 m
Type of cable plug:	EU
Inrush current:	25A at 230V for 2ms
Controls:	
Control variant:	P
Level control:	YES
Pulse control:	YES
Ext. Stop input:	Yes
Output relays:	No
Others:	
Net weight:	3 kg
Gross weight:	4 kg

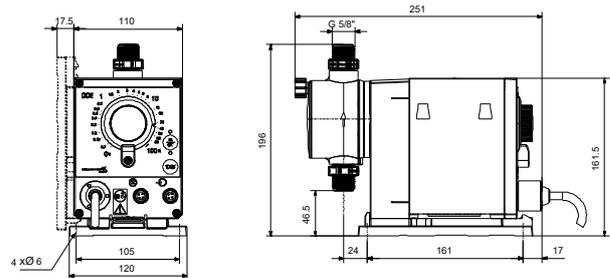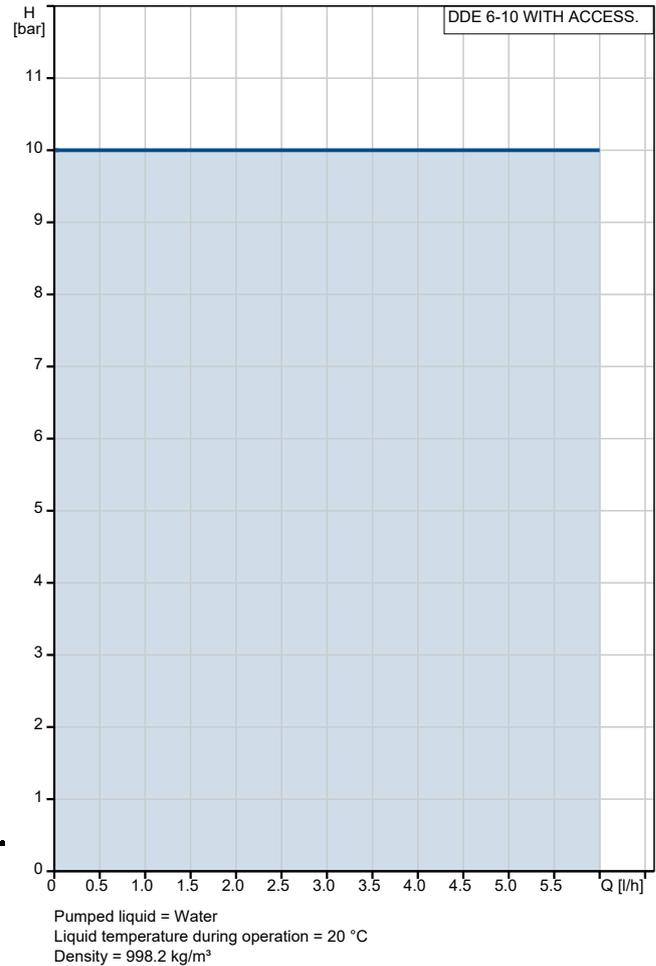

97974043 DDE 6-10 WITH ACCESS.

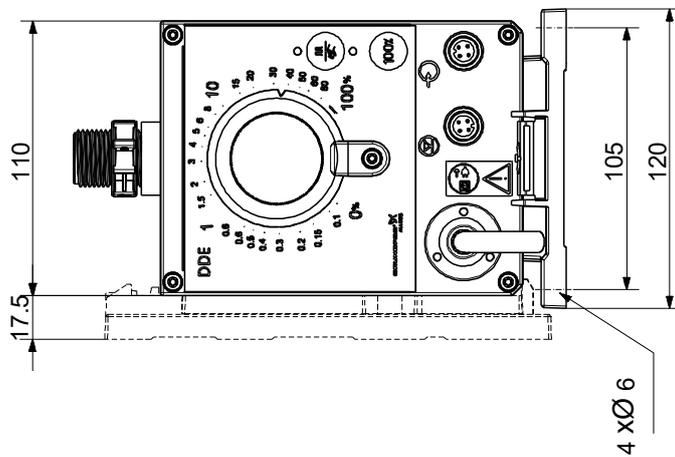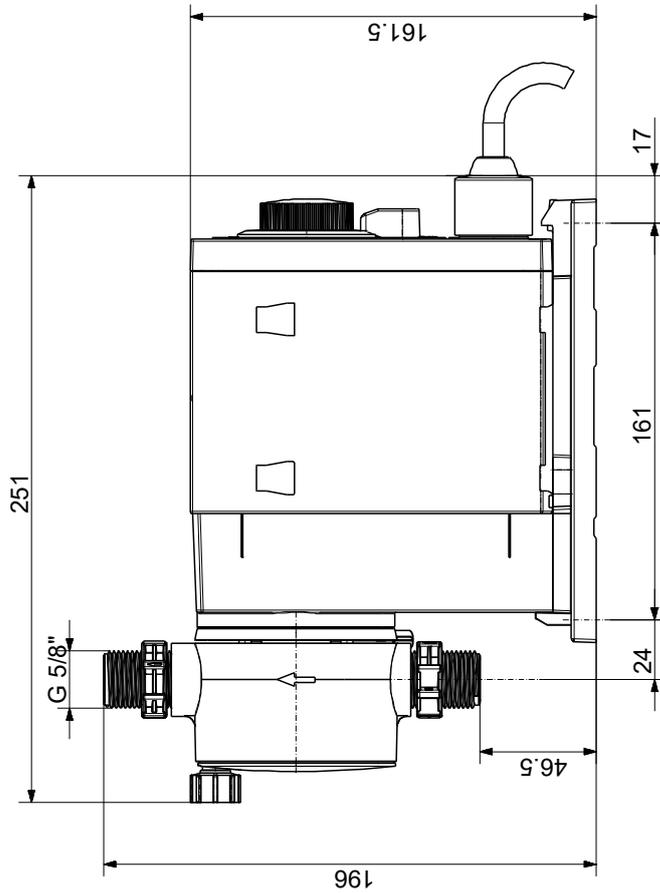

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.