




98706527 HYDRO MULTI-S 2 CR 15-4 60 Hz

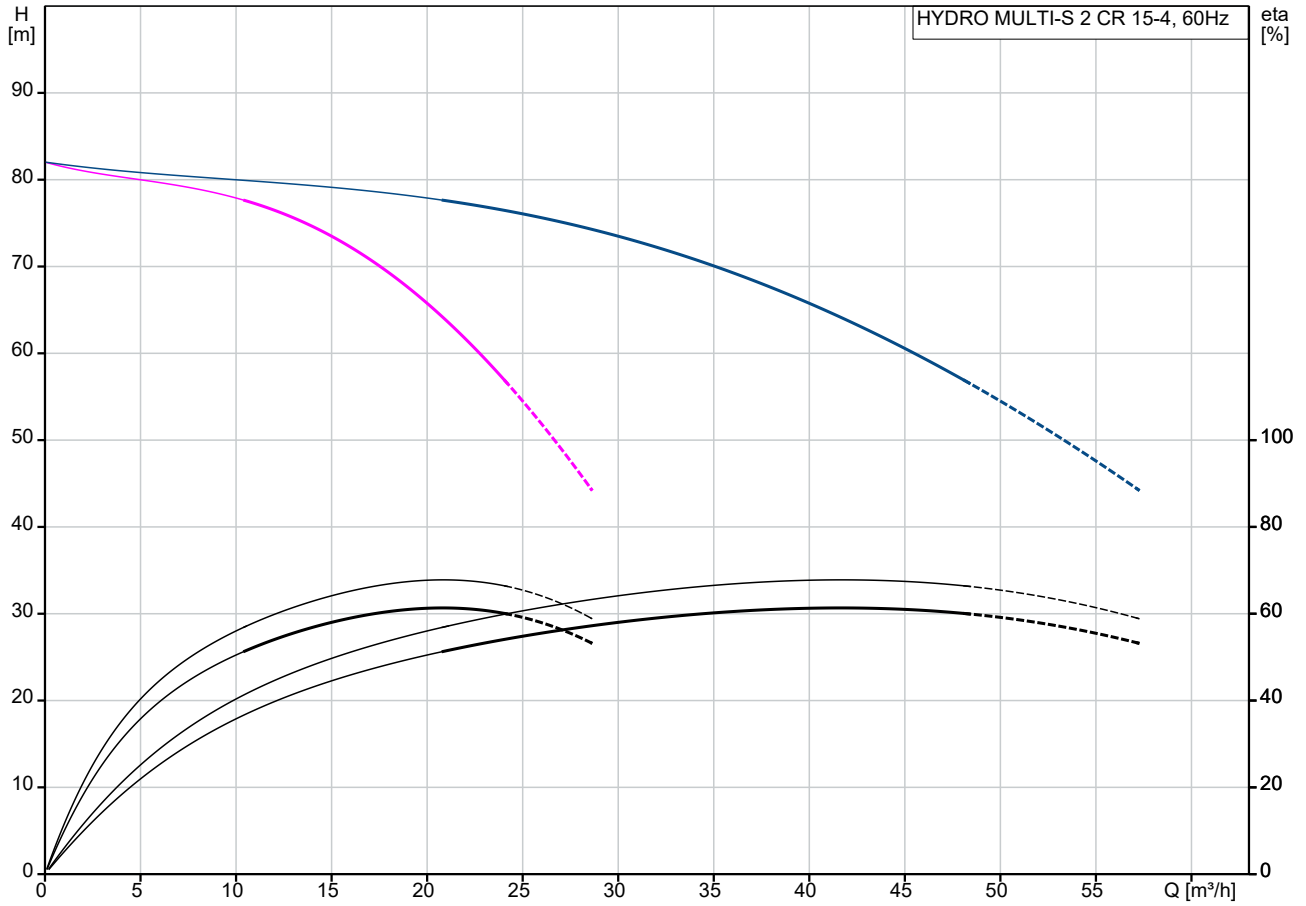

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

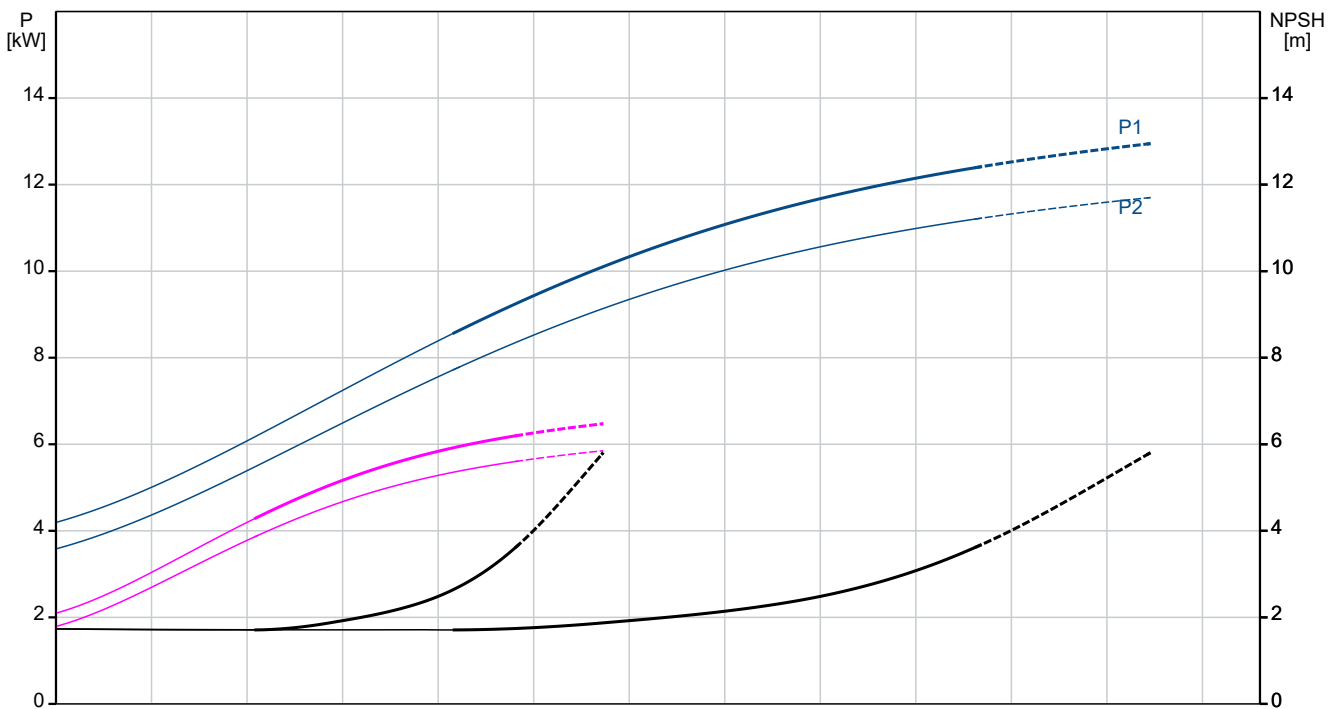

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CR 15-4
Product No:	98706527
EAN number:	5711499775816
Technical:	
Rated flow:	41 m ³ /h
Maximum flow:	28.4 m ³ /h
Min flow system:	10.3 m ³ /h
Max flow system:	28.4 m ³ /h
Rated head:	65 m
Maximum head:	82 m
Approvals:	CE
Pump name:	CR15-4
Model:	A
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-200
Pump housing:	ASTM A48-25A
Manifold:	Galvanised steel
Base:	Steel
Base:	EN 1.0533
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	2 1/2"
Earth connection:	PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Rated power - P2:	5.5 kW
Mains frequency:	60 Hz
Rated voltage:	3 x 208-230/440-480 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	252 kg
Gross weight:	333 kg
Shipping volume:	0 m ³
Language:	GB
Sales region:	APAC

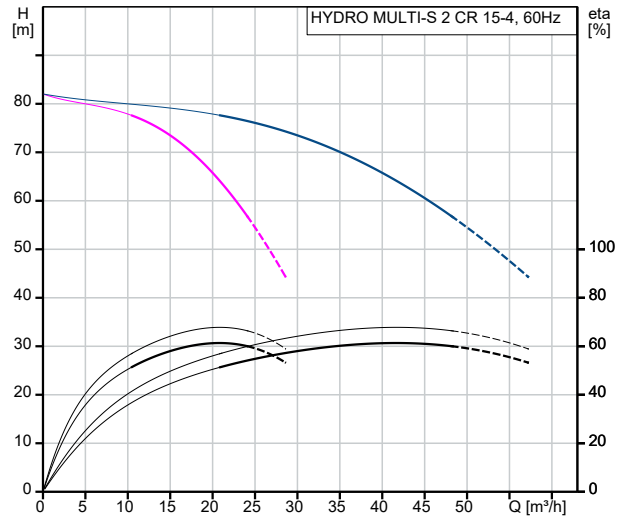

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

