




98706525 HYDRO MULTI-S 2 CR 15-2 60 Hz

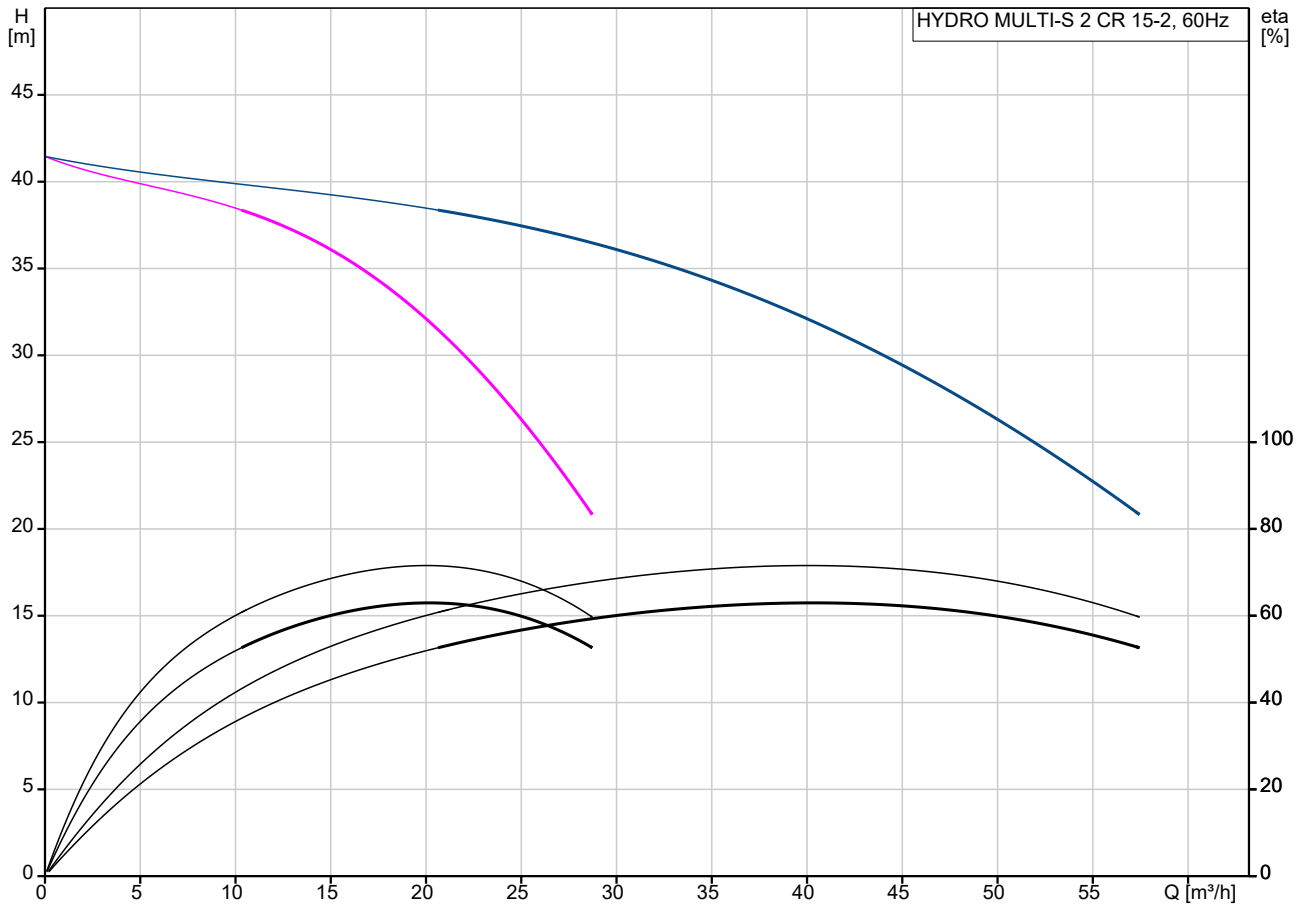

Losses in fittings and valves not included
 Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

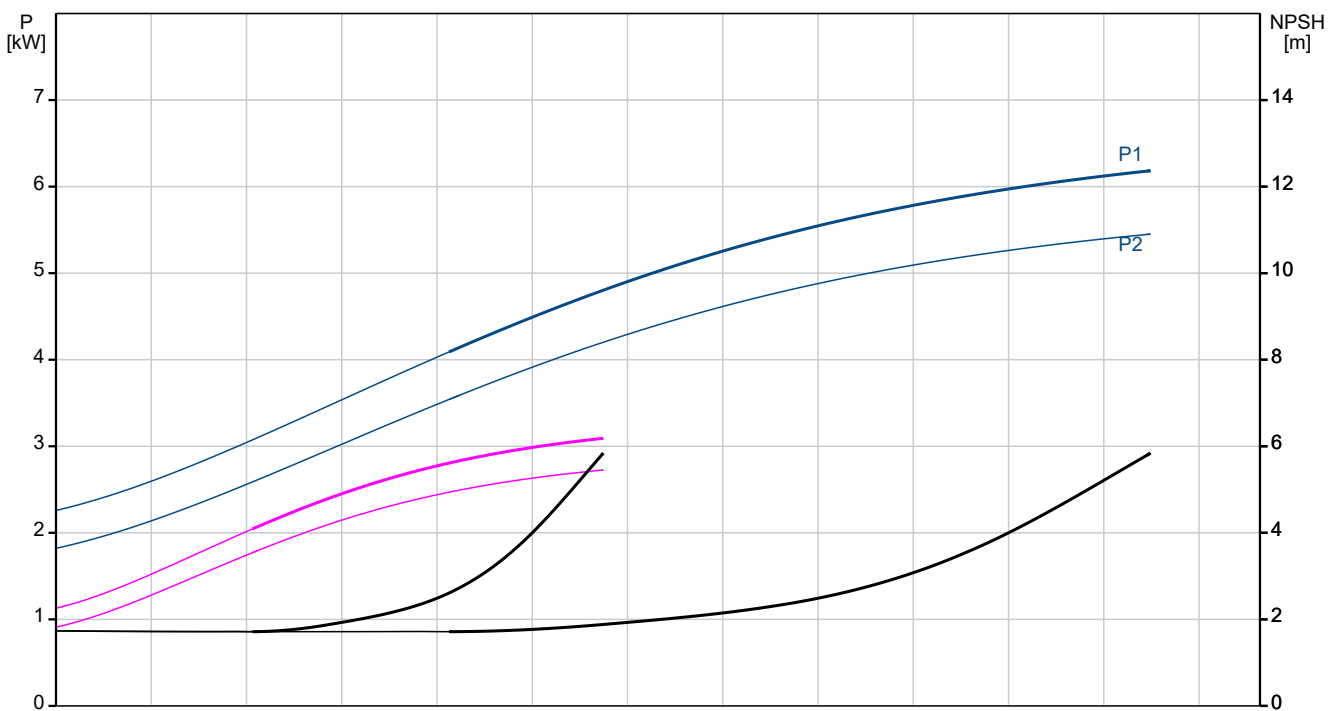

Description	Value
General information:	
Product name:	HYDRO MULTI-S 2 CR 15-2
Product No:	98706525
EAN number:	5711499775793
Technical:	
Rated flow:	41 m³/h
Maximum flow:	28.4 m³/h
Min flow system:	10.3 m³/h
Max flow system:	28.4 m³/h
Rated head:	32 m
Maximum head:	41 m
Approvals:	CE
Pump name:	CR15-2
Model:	A
Non-ret. valve:	NO
Number of pumps:	2
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-200
Pump housing:	ASTM A48-25A
Manifold:	Galvanised steel
Base:	Steel
Base:	EN 1.0533
Installation:	
Maximum operating pressure:	10 bar
Pipe connection:	2 1/2"
Earth connection:	PE
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	5 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Rated power - P2:	3 kW
Mains frequency:	60 Hz
Rated voltage:	3 x 208-230/440-480 V
Method of start:	DOL
Enclosure class (IEC 34-5):	IP54
Others:	
Net weight:	154 kg
Gross weight:	235 kg
Shipping volume:	0 m³
Language:	GB
Sales region:	APAC

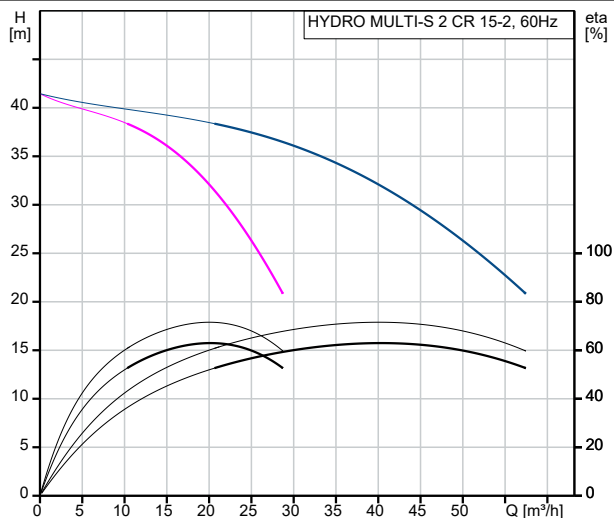

Losses in fittings and valves not included
Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

